
Fig. | Drawings and Illustrations

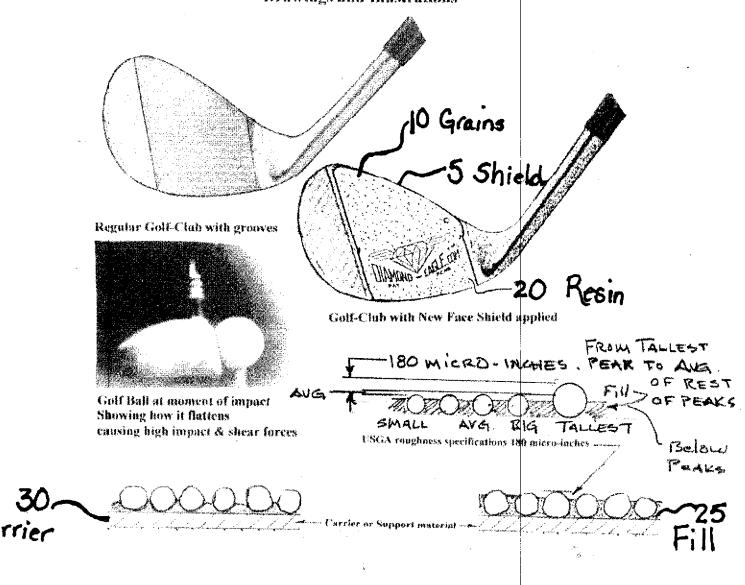

USGA roughness specifications 180 micro-inches

Shield material
Support material if utilized
Athesive Jayer
Release film if required

Manufactured Surface roughness & a pattern

Fig. Z

